
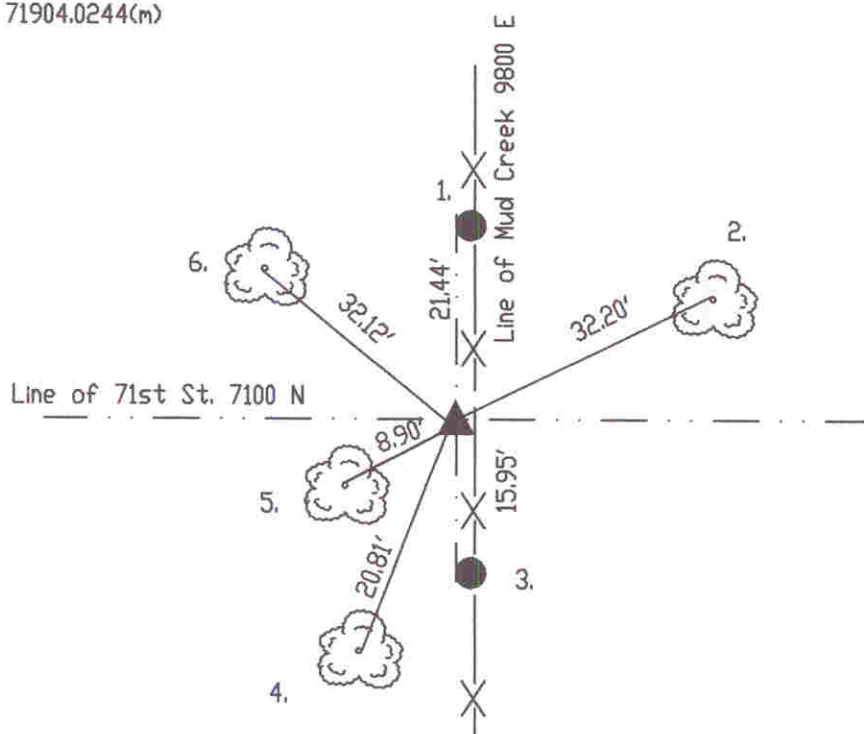


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 32 TOWNSHIP 17 RANGE 5
DATE: 12-16-99
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: 6"x6" conc.monu U.S. gov't
METHOD OF ESTABLISHMENT: County: 3-8-94

IN. S.P.C. E ZONE, NAD 83
NAME: 17053201
N: 514658.0191(m)
E: 71904.0244(m)

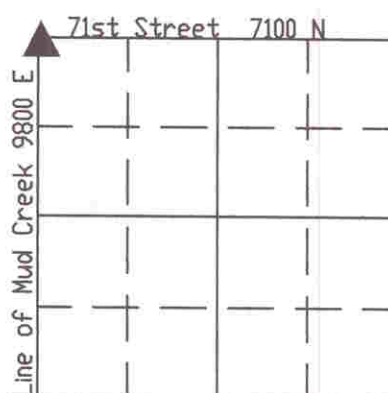

Original post set 1821 by Laughlin with witnesses: 10" ash N 26 links, 12" buckeye S 5 E 33 links, 10-1866 Smith per Lawrence Township Legal Survey Book pg. 13, called "D" and stone. 18" ash N 68 W 85 links given. Distances were given N & E. 11-1880 Fatout per Lawrence Township Legal Survey Book pg. 39 called "I" with stone witnesses. Distance given to N Q of Sec. 32. Legal Survey 11-1880 by Fatout per Lawrence Township Legal Survey Book pg. 52 does not describe corner but does give witness to W Q of NW Q showed distance to W Q. Schneider Engineering survey of Fort Benjamin Harrison. 11-16-81 called for U.S. Gov't stone monument at corner. Distances and bearings were given in all (4) directions. Re-tied 3-8-94 by Kiste. Re-tied 12-16-99 by Wilcoxon.

HC753201

REF.	DISTANCE	DESCRIPTION
1.	21.44'	Noe to mag nail w/brass washer top fence post
2.	32.20'	PK nail w/shiner N 10' twin ash 12"up
3.	15.95'	South to mag nail w/brass washer top fence post
4.	20.81'	Boat spike E 10' walnut 3'up
5.	8.90'	PK nail w/shiner NW 24' hackberry 12"up
6.	32.12'	Boat spike SW 36" buckeye 36"up